



HD Indoor Fixed Installation

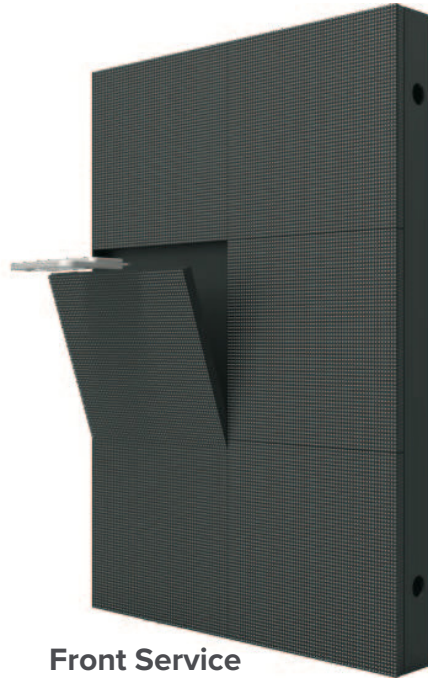

Front Service and Installation

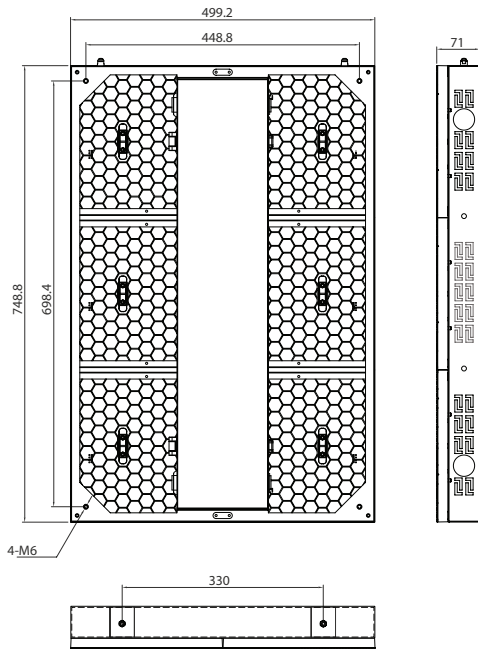

HD Indoor Fixed Installation

A permanently installed LED display requires a high quality panel with durability and superior image quality.

HD Indoor Fixed Installation LED Panel Specifications

STANDARD

MODEL	H3I	H4I
PIXEL PITCH	3	4
PANEL WEIGHT (lbs)	18.74	17.64
PANEL DIMENSIONS (w x h)	576 x 576mm	512 x 512mm
PANEL RESOLUTION (w x h)	192 x 192px	128 x 128px
MODULE DIMENSIONS (w x h)	192 x 192mm	256 x 128mm
MODULE RESOLUTION (w x h)	64 x 64px	64 x 64px
BRIGHTNESS (nits)	1100	1300
MAINTENANCE	Rear	Rear
DIODE TYPE	SMD	SMD
MAX POWER (W/sqm)	650	430
AVERAGE POWER (W/sqm)	230	130
VIEWING ANGLE (H)	140	140
VIEWING ANGLE (V)	140	140
REFRESH RATE	≤ 1920Hz	≤ 1920Hz
GREY (bit)	14	14



LIGHTWEIGHT

MODEL	HL28I	HL28IV	HL31I	HL39I	HL39IV	HL48I
PIXEL PITCH	2.84	2.84	3.1	3.9	3.9	4.8
PANEL ORIENTATION	H	V	H	H	V	H
PANEL WEIGHT	23	23	23	23	23	23
PANEL DIMENSIONS (w x h)	500 x 500mm	500 x 1000mm	500 x 750mm	500 x 750mm	500 x 1000mm	500 x 750mm
PANEL RESOLUTION (w x h)	176 x 176px	176 x 352px	160 x 240px	128 x 192px	128 x 384px	104 x 156px
MODULE DIMENSIONS (w x h)	250 x 250mm	250 x 250mm	250 x 250mm	250 x 250mm	250 x 250mm	250 x 250mm
MODULE RESOLUTION (w x h)	88 x 88px	88 x 88 px	80 x 80 px	64 x 64px	64 x 64px	52 x 52px
BRIGHTNESS (nits)	1200	1200	1000	1000	1000	1000
MAINTENANCE	Front	Front	Front/Rear	Front/Rear	Front/Rear	Front/Rear
DIODE TYPE	SMD 2020	SMD 2020	SMD 2020	SMD 2020	SMD 2020	SMD 2020
MAX POWER (W/sqm)	500	500	540	520	520	480
AVERAGE POWER (W/sqm)	183	183	135	130	130	120
VIEWING ANGLE (H)	160	160	160	160	160	160
VIEWING ANGLE (V)	160	160	160	160	160	160
REFRESH RATE	≤ 1920Hz	≤ 1920Hz	≤ 1920Hz	≤ 1920Hz	≤ 1920Hz	≤ 1920Hz
GREY (bit)	12	12	16	16	16	16

Specifications are accurate at time of printing. Actual specifications may vary due to customizations or updates. Specifications should be confirmed upon ordering.